

Platinum Restrictor & Support Arm
Manufactured in 304 Austenitic Stainless Steel



Platinum Restrictor & Support Arm

Manufactured in 304 Austenitic Stainless Steel to ensure corrosion free performance, with solid core spin riveted components for geometrical accuracy.


Features

- Rectangular channel profile for better friction control
- Combination of nylon & stainless steel slider components for smooth and accurate sliding
- Polished Surface for smoother operation and ease of cleaning

Tested to British & European Standards:




Application for Support Arm & Variable Arm.

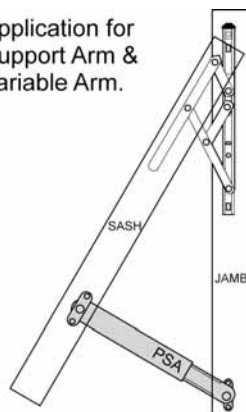

Open Position

Close Position



Restrictor and Support Arms are designed to be used in pairs



Standard Restrictor			
Product Code	Size	Stack Height (+ 1mm)	Application
PS-R 10	10.5"	13 mm	Top & Side Hung



Support Arm				
Product Code	Length (Open)	Length (Close)	Stack Height (+ 1mm)	Application
PSA 8	8"	5.5"	16 mm	Top Hung
PSA 10	9.75"	6.5"	16 mm	Top Hung



Heavy Duty Restrictor			
Product Code	Size	Stack Height (+ 1mm)	Application
PH-R 10	10.25"	16 mm	Top & Side Hung



Variable Support Arm				
Product Code	Length (Open)	Length (Close)	Stack Height (+ 1mm)	Application
PVA 10	10"	7.5"	16 mm	Top Hung
PVA 12	12"	6.5"	16 mm	Top Hung

The above is intended as a guide, please contact manufacturer for specific application. Regular maintenance is required on stays fitted in coastal, high humidity and corrosive environments for optimum operation. Doric has a policy of continual product improvement, as such we reserve the right to change specifications without notice.

For top hung windows over 1000mm in height, the opening must be restricted to a maximum of 200mm projection. We recommend Doric Restrictor Arms to be fitted.

Head Office: Phone + 61 (0) 2 9609 2555
Fax: + 61 (0) 2 9604 2910

sales@doric.com.au
www.doric.com.au

